
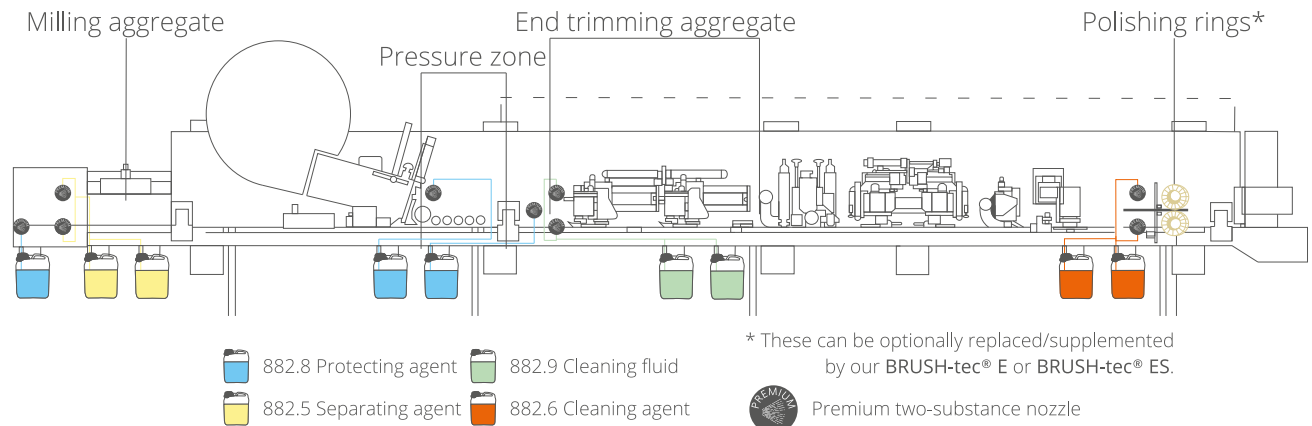




KLEIBERIT PRODUCTS FOR EDGEBANDING MACHINES



	Article number KLEIBERIT	Article number RIEPE	Field of application	Packaging
	882.5.0100	LPZ II	Release agent	bottle 1 L net
	882.5.1000	LPZ II	Release agent	plastic pail 10 L net
	882.5.3000	LPZ II	Release agent	plastic pail 30 L net
	882.6.0100	LP163/93	Cleaning agent	bottle 1 L net
	882.6.1000	LP163/93	Cleaning agent	plastic pail 10 L net
	882.6.3000	LP163/93	Cleaning agent	plastic pail 30 L net
	882.7.0100	305/98	Cleaning agent	bottle 1 L net
	882.7.1000	305/98	Cleaning agent	plastic pail 10 L net
	882.7.3000	305/98	Cleaning agent	plastic pail 30 L net
	882.8.0100	NFLY	Protecting agent	bottle 1 L net
	882.8.1000	NFLY	Protecting agent	plastic pail 10 L net
	882.8.3000	NFLY	Protecting agent	plastic pail 30 L net
	882.9.0100	LP289/99	Cleaning fluid	bottle 1 L net
	882.9.3000	LP289/99	Cleaning fluid	plastic pail 30 L net

Release agent KLEIBERIT 882.5

Is sprayed onto the top and bottom of the panel at the infeed of the machine. It prevents adhesive residue from sticking to the panel. It evaporates quickly and leaves a protective layer on the material.

Cleaning agent KLEIBERIT 882.6

Is sprayed onto the surface to be cleaned before the polishing brushes. Cools the glue line and edges, reduces heating during polishing. Prevents clogging of the brushes. Removes unwanted residues of release agent and adhesive. Restores the original gloss of the finished edges.

Cleaning agent KLEIBERIT 882.7

Concentrated cleaner for streak-free cleaning of all water-resistant surfaces. High grease dissolving power thanks to a high alcohol content. Leaves no streaks or residues.

Protecting agent KLEIBERIT 882.8

Protective agent for pressure rollers, anti-friction runners and sensitive edges (acrylic). Is sprayed onto the pressure rollers and/or the edge. Prevents/reduces excess adhesive on pressure rollers, skids. Prevents the protective film from peeling off sensitive edges.

Cleaning fluid KLEIBERIT 882.9

Cooling the glue line to room temperature. Due to the constant use of the medium and thanks to the cooled joint, the adhesive does not contaminate the panel and the processed surface is free of soiling. Furthermore, the coolant fulfills an additional cleaning function, which in combination with the 882.6 cleaning agent leads to a perfect result.